

SAFETY JOGGER

INDUSTRIAL

SPORTS

TURBO S3

Fashionable low-cut safety shoe for active professionals

Upper	Nubuck Action Leather
Outsole	PU, Rubber
Toecap	Composite
Midsole	Anti-puncture Textile
Lining	3D-Mesh
Footbed	SJ foam footbed
Safety category	EN ISO 20345 - S3 / SRC, HRO
Sample weight	0.600 gr.
Size range	EU 35-47 / UK 3.0-12.0 / US 3.0-13.0 / CM 23.0-31.0



094



S3
S3 safety shoes are suitable for work in an environment with high humidity and presence of oil or hydrocarbons. These shoes also protect against perforation risk of the sole, and foot crushing.



SRC SLIP RESISTANCE
Slip resistant soles are one of the most important features of safety and occupational footwear. SRC slip resistant soles pass both SRA and SRB slip resistant tests, they are tested on both steel and ceramic surfaces.



HEAT RESISTANT OUTSOLE (HRO)
The outsole resists high temperatures up to 300°C.



ANTISTATIC
Antistatic footwear prevents build-up of static electrical charges and ensures that they are discharged effectively. Volume resistance between 100 KiloOhm and 1 GigaOhm



COMPOSITE TOECAP
Metalfree and lightweight, no thermal or electrical conductivity



SJ FLEX
Metalfree puncture resistant material, which is lighter and more flexible than steel. The material is not thermal conductive. Covers 100% of the surface of the last bottom.

SPORTS

TURBO S3

Industries:


Automotive, Cleaning, Construction, Industry, Logistics

Environments:

Dry environment, Warm surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

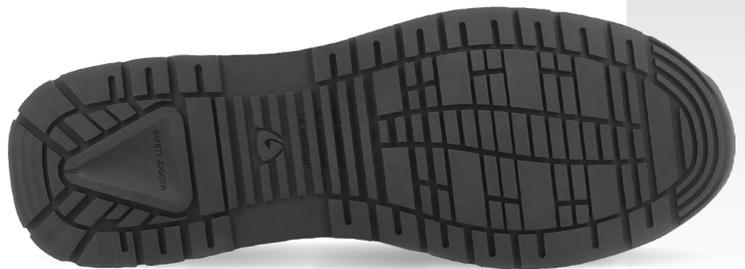

	Description	Measure unit	Result	EN ISO 20345
Upper	Nubuck Action Leather			
	Upper: permeability to water vapor	mg/cm ² /h	3.9	≥ 0.8
	Upper: water vapor coefficient	mg/cm ²	38.4	≥ 15
Lining	3D-Mesh			
	Lining: permeability to water vapor	mg/cm ² /h	50.8	≥ 2
	Lining: water vapor coefficient	mg/cm ²	406.9	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance	cycles	400	≥ 400
Outsole	PU, Rubber			
	Outsole abrasion resistance (volume loss)	mm ³	40	≤ 150
	Outsole slip resistance SRA: heel	friction	0.53	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.50	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.14	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.18	≥ 0.18
	Antistatic value	MegaOhm	0.32	0.1 - 1000
	ESD value	MegaOhm	NA	0.1 - 100
	Heel energy absorption	J	30	≥ 20
Toecap	Composite			
	Impact resistance toecap (clearance after impact 100J)	mm	NA	≥ 14
	Compression resistance toecap (clearance after compression 10kN)	mm	NA	≥ 14
	Impact resistance toecap (clearance after impact 200J)	mm	17.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	21.5	≥ 14

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.

Sample size:
41